


Ducts

SRIN



Dimensions

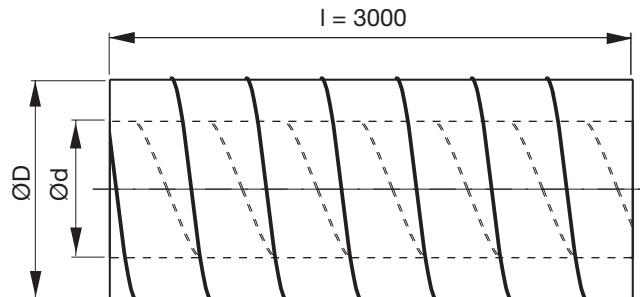

Description

The duct is double-jacketed and insulated with mineral wool.

NB.

No Safe Click marking on insulated ducts.

Ød nom	ØD mm	m ₁ kg/m
80	112	2,50
100	132	3,50
125	157	4,00
160	192	5,00
180	200	5,33
200	232	6,33
224	260	7,33
250	280	7,80

* Hole for SRIN 6 mm wider than ØD.

Ordering example

