


Duct

LKR



Dimensions

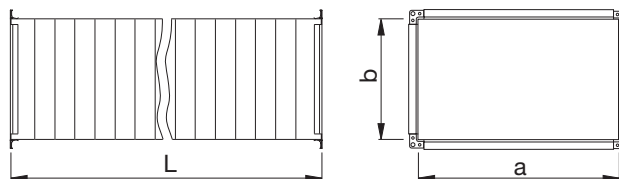

Description

Straight duct, stiffened with transverse trapezoid corrugations, which reduces the risk of noise generation. Larger dimensions have stiffening profiles and/or internal rods. Installation height of these profiles is 23 mm.

Ducts are normally supplied with a strong joining profile RJFPC3 20, RJFPC3 30 or RJFPC3 40 at each end, but can also be supplied as a flexible piece, where the joining profile on one end is not fixed. Also available with an end cover fixed by joining profiles.

Ordering example

	LKR	500	300	1500	1
Product					
Largest side	a				
Smallest side	b				
Length	L				
RJFP3C-joint at both ends		1			
RJFP3C-joint at one end		2			
Loose joint included.					
RJFP3C-joint at one end		3			
End cover on joining profiles at other end.					
End cover on joining profiles at both ends.		4			
RJFP3C-joint at one end		5			
No loose joint included.					